

Accessories

End cap for side guide profile



An end cap is attached to the end of a side guide. The contour prevents products from being caught.

Designation	Dimensions	Reference number
End cap for side guide profile	100 x 40 x 40 mm (3.9" x 1.5" x 1.5")	63010039


End cap for side profile



The end cap closes a side profile at the front.

Designation	Dimensions	Reference number
End cap for side profile	115 x 35 x 3 mm (34.5" x 1.3")	64000900


Actuator

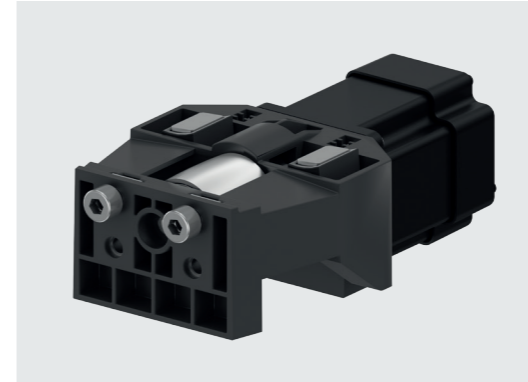

By using 24 V actuators, a 460 V roller conveyor can be operated as a zone conveyor. The actuators can be controlled for zero pressure accumulation mode via the Interroll controllers. Additional components are required to change a transport conveyor into a zone conveyor. Please contact your Interroll customer representative.

Designation	Dimensions	Reference number
24 V actuator	177 x 100 x 65 mm (6.9" x 3.9" x 2.5")	63010261

Magnetic Speed Controller 50

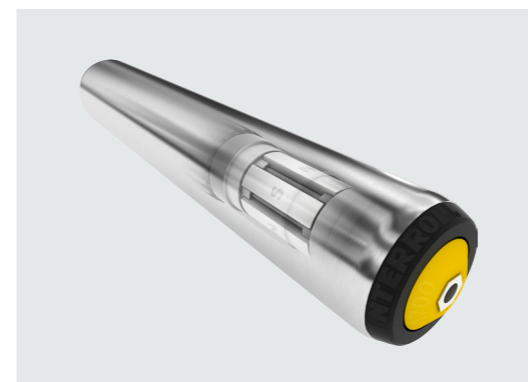

The Magnetic Speed Controller 50 is a purely mechanical speed controller that ensures a controlled, slow speed on gravity conveyors with materials weighing from 0.5 kg (1 lbs) to a maximum of 35 kg (77 lbs). The magnetic speed controller operates without a gear box, thus enabling startup for very lightweight containers. Heavy containers are transported at a controlled speed thanks to the consistently high braking performance.

Designation	Dimensions
Magnetic Speed Controller 50	Min./max. installation length (EL): 210 - 1400 mm (8" / 55") Tube diameter: Steel 51 mm (1.97"), steel with PU sleeve 54 mm (2.22")